


eArc

SMF375M-6X12UW

375Watt

72 Cell Monocrystalline Module

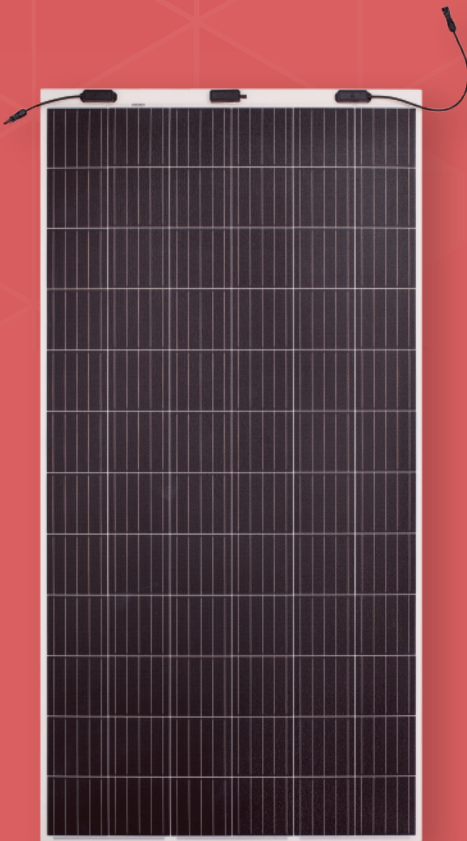

Ultra-light: Through replacement of glass and optimization of the frame, eArc weighs 70% less than conventional PV panels.



Flexible: eArc combines a unique, patented material with other industry-leading technologies to produce a flexible crystalline-silicon panel that can be installed on curved surfaces.



Transportable: eArc's thin frame and low weight significantly cuts transportation and freight costs.



Installation-friendly: eArc reduces installation cost by up to 50% through its re-engineered components, ease of handling and shorter installation time.



Aesthetic: Aesthetically designed panel that is PID-free, safe and emits no light pollution.



Deployable: eArc's lightweight, flexibility and customizability changes the way solar is deployed in the market and brings added value to special applications.



Durable: eArc panels are certified to withstand maximum test load (2400 Pascal), while special materials and stringent quality control ensure panel longevity.

POWER OUTPUT RANGE 370~375W

POWER TOLERANCE 0-5 W

10 Year Product Warranty

25 Year Linear Power Warranty



www.sunman-energy.com




ULTRA-LIGHT & FLEXIBLE SOLAR PANEL


LINEAR PERFORMANCE WARRANTY

CAUTION: Read installation manual before using the product.


©2020 Sunman (zhenjiang) Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

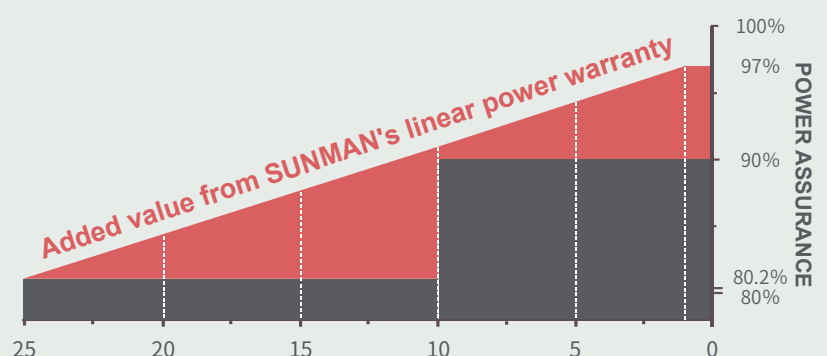

DIMENSIONS

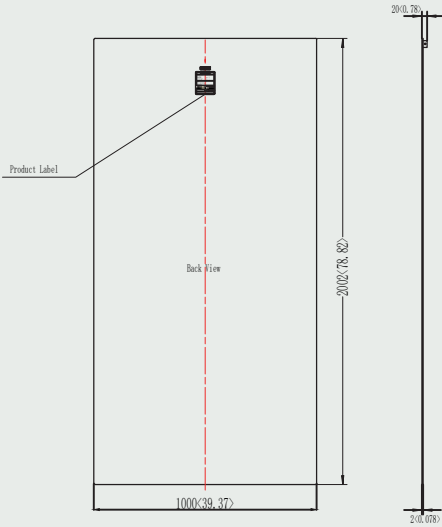


I-V CURVE (375)

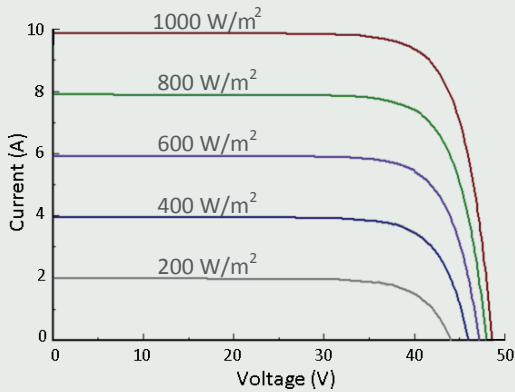

TEMPERATURE CHARACTERISTICS

Nominal Module Operating Temperature(NOMT)	41±2 °C
Temperature Coefficient of P_{max}	-0.38 %/°C
Temperature Coefficient of V_{oc}	-0.28 %/°C
Temperature Coefficient of I_{sc}	0.020 %/°C



SMF375M/IEC EN 2020A

ELECTRICAL CHARACTERISTICS

STC	SMF370M-6X12UW	SMF375M-6X12UW
Maximum Power (P_{max})	370	375
Maximum Power Voltage (V_{mp})	39.9	40.2
Maximum Power Current (I_{mp})	9.28	9.33
Open-circuit Voltage (V_{oc})	48.4	48.6
Short-circuit Current (I_{sc})	9.81	9.86
Module Efficiency (%)	18.5	18.7
Operating Temperature	-40 °C to 85 °C	
Maximum System Voltage	1000 V DC (IEC)	
Maximum Series Fuse Rating	20 A	
Application Class	Class A	
Power Tolerance	0/+5 W	

STC: Irradiance 1000W/m², Cell temperature 25 °C, AM=1.5. Tolerances of P_{max} , V_{oc} and I_{sc} are within ±5%

NMOT	SMF370M-6X12UW	SMF375M-6X12UW
Maximum Power (P_{max})	278	282
Maximum Power Voltage (V_{mp})	36.8	37.0
Maximum Power Current (I_{mp})	7.56	7.63
Open-circuit Voltage (V_{oc})	45.1	45.3
Short-circuit Current (I_{sc})	8.00	8.07

NMOT: Irradiance 800W/m², Ambient temperature 20 °C, AM=1.5, Wind speed 1 m/s.

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline silicon (158.75mm)
No. of Cells	72 (6×12)
Module Dimensions	2002×1000×2 mm
Weight	5.8kg
Backsheet	White
Frame	Frameless
J-box	IP 68 rated
Output Cables	Photovoltaic technology cable 4.0 mm 2, (+)150 / (-)450 mm
Connector	MC4 compatible

PACKAGING CONFIGURATION

	20' GP	40' HC
Module per pallet	66	66
Pieces per container	330	1452